

# Amore Bay®


Seating Capacity.....	7 Adults
Dimensions .....	92" x 108" x 40", (234 cm x 275 cm x 102 cm)
Dry Weight.....	1,011 lbs (459 kg)
Filled Weight (Average Fill) .....	4,467 lbs (2,026 kg)
Water Capacity (Average Fill).....	415 US gallons (1,571 Liters)
Shipping Weight .....	1,011 lbs (459 kg)
Export Shipping Weight:.....	<b>1,061 lbs (481 kg)</b>
Electronic Controls .....	D1 SmartHUB™ full color glass touch control panel; access to control jets, temperature, settings and maintenance schedule
Pump 1.....	North America (60 Hz): 2-Speed, 4.0 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):.....	<b>2-Speed, 2.0 HP continuous</b>
Pump 2.....	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):.....	<b>1-Speed, 2.0 HP continuous</b>
Pump 3.....	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):.....	<b>1-Speed, 2.0 HP continuous</b>
Circulation Pump.....	Yes
Fountain Pump .....	Yes
Filtration (factory default) .....	24/7 Filtration (Purge Cycles 2 x 10 minutes)
Total VCR Jets .....	60
Seat 1 UltraLounge Jets.....	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 4 Power Storm Dual Rotator, 2 Power Storm Directional, 2 Euro Cluster Storm Directional, 4 Power Storm Rotator
Seat 2 Jets .....	4 Euro Cluster Storm Directional, 4 Mini Storm Rotator, 4 Power Storm Rotator
Seat 3 Jets .....	2 Mini Storm Rotator, 2 Mini Storm Directional, 2 Euro Cluster Storm Directional
Seat 4 Jets .....	5 Mini Storm Directional, 2 Power Storm Dual Rotator, 1 Power Storm Directional
Seat 5 UltraLounge Jets.....	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 10 Mini Storm Rotator, 3 Mini Storm Directional, 2 Euro Cluster Storm Rotator
Footwell (6).....	1 Typhoon
Massage Selectors .....	2
Special Features .....	Tactile Therapy, Spa Status Light, Echo Switch, 2 Flex Therapy Pillow, 2 UltraLounge, 1 Dynamic Massage Sequence
Water Management System.....	UltraPure™ Plus; Two 75 ft filter cartridge; 8" Weir
LED Lighting .....	Liquid FX™
Optional.....	Exterior Lights
Synthetic Cabinet Colors.....	Adobe Tan, Stoneridge Grey, Mayan Brown
Terracina Cabinet (Optional) .....	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midnight Maple
Acrylic Colors .....	Moonstone, UltraLife, Sunstone, Smoked Marble, Gray Marble, Desert Stone
Headrests .....	2 Flex Therapy Pillow
Water Feature.....	Fountain with independent flow rate (on or off) adjustment; powered by the fountain pump
Heater .....	Fast Flow 2.1, 3.4, 5.5 kW
Export (50 Hz):.....	<b>Fast Flow 2.1, 3.4, 5.5 kW</b>
Electrical Requirements: .....	North America (60 Hz): 240 VAC@40A or 50A <b>Export (50 Hz): 230 VAC@1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs</b>
Warranty*.....	North America (60 Hz): Lifetime for UltraLife Shell Structure, 7 Years Acrylic Shell Structure, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo</b>
Audio System (Optional).....	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer
Wi-Fi (Optional).....	D1 Connect App



\*(See Warranty Document for Specific Details)


# Amore Bay

## Massage Selector Diagram

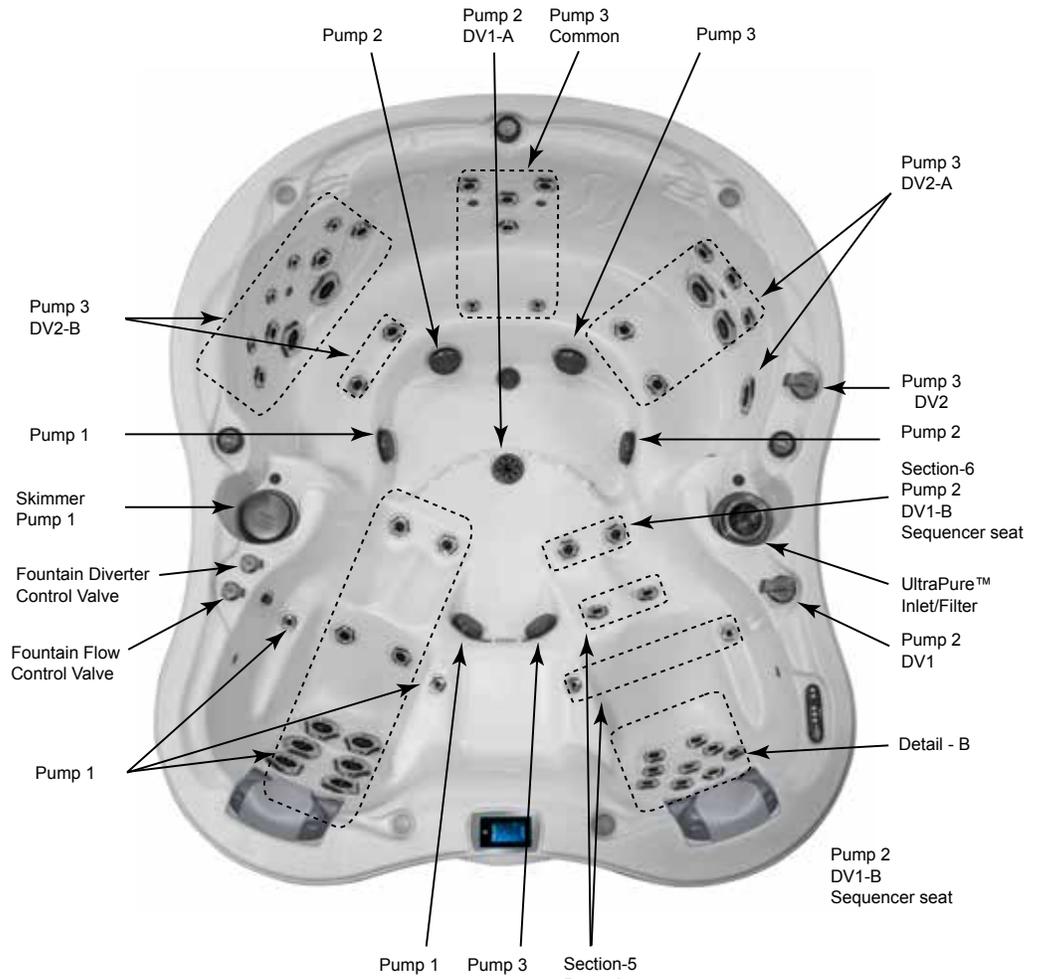

DV1 A =Diverter Valve 1 (A Position Clockwise)  
 DV1 B =Diverter Valve 1 (B Position Counter Clockwise)  
 DV1 C =Diverter Valve 1 (Neutral Position)  
 DV2 A =Diverter Valve 2 (A Position Clockwise)  
 DV2 B =Diverter Valve 2 (B Position Counter Clockwise)  
 DV2 C =Diverter Valve 2 (Neutral Position)

2. All drains and skimmer tied in common loop.



Spa Operation Subject to Change without Notice

## Seat Depths

- 1 = 30.00" (76.20 cm)
- 2 = 26.00" (66.04 cm)
- 3 = 25.00" (63.50 cm)
- 4 = 24.50" (62.23 cm)
- 5 = 23.00" (58.42 cm)
- 6 = 25.50" (64.77 cm)

- 7 = 33.00" (83.82 cm)



Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice




# Amore Bay

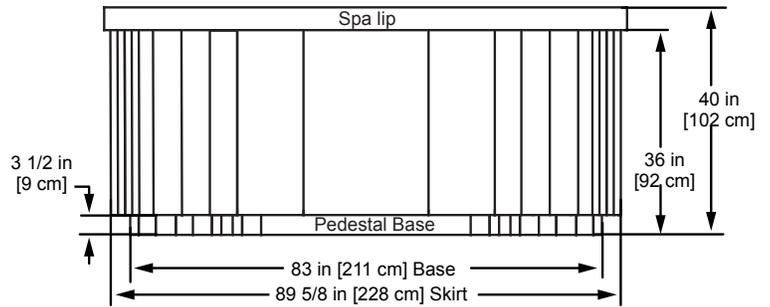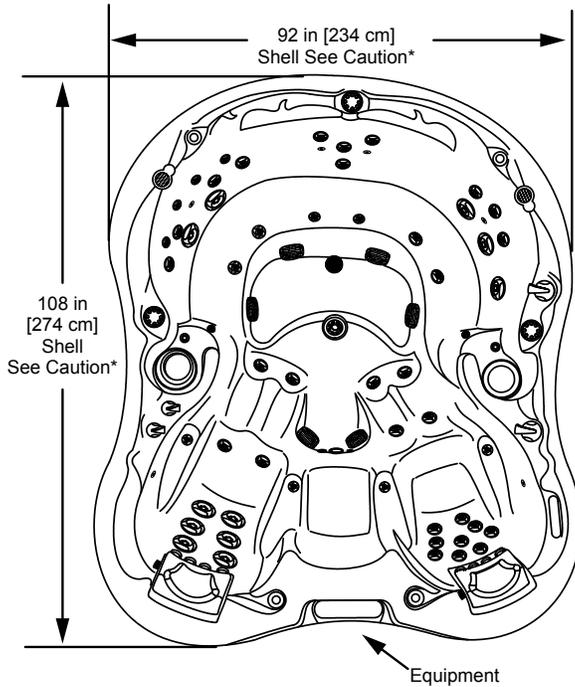

**STOP**

**\*Caution:**  
Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

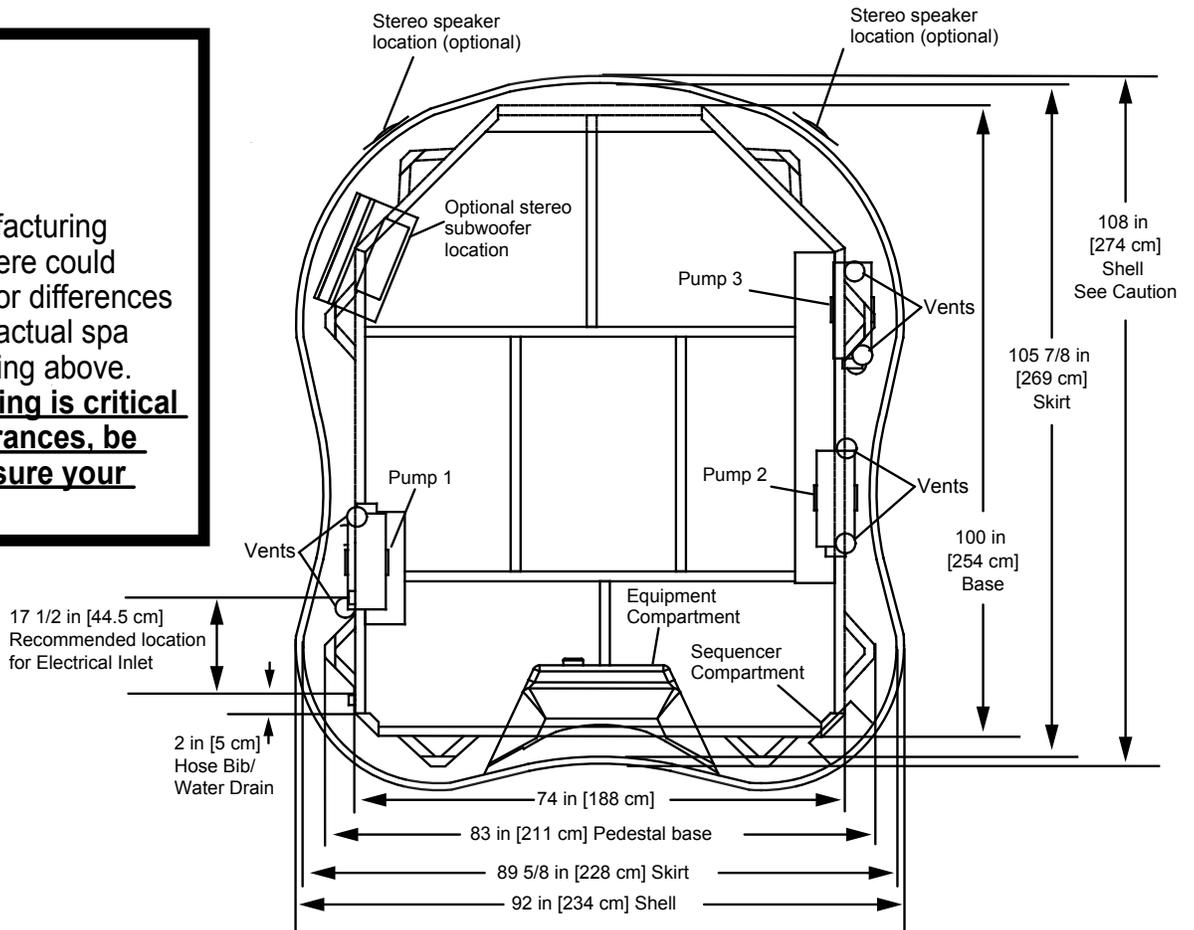

- Note:
1. Subject to change without notice.
  2. Engineering specs may differ slightly from brochure.
  3. For E-Z lifter installation allow 18" (45.72cm) clearances on the backside of the spa.
  4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
- Dimensions/Specifications are Subject to Change Without Notice (Tolerance  $\pm 0.5"$  [1.27 cm]).