
Seating Capacity		A-1-8-
Dimensions		
Corner Radius	(232 cm x 232 cm x 91 cm)	0
Corner Radius	9" (23 cm)	6 6
Dry Weight	/ 10 IDS (322 Kg)	0 0
Filled Weight (Average Fill)	3,923 IDS (1,779 Kg)	
Water Capacity (Average Fill)		e e
Shipping Weight Export Shipping Weight:	/ 10 IDS (322 Kg)	4 1-1 9
Export Shipping Weight	Programmable digital panel with LED readout	-1
	Programmable digital parier with LED readoutNorth America (60 Hz): 2-Speed, 4.0 HP break,	
	2.5 HP continuous, 48 Frame	
	2-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 4.0 HP break,	
	2.0 HP continuous. 48 Frame	
Export (50 Hz):	2.0 HP continuous, 48 Frame1-Speed, 2.0 HP continuous	
Circulation Pump	Optional with ClearZone® Pro package	Optional
Filtration (factory default)	2 Cycles for a total of 2 hours	
Heater		escutcheon jets
Export (50Hz)		
Total @Home Jets		
Seat 1 UltraLounge Jets	6 Mini Storm Rotator, 4 Mini Storm Directional,	
_	2 Poly Storm Rifled, 2 Mini Storm Rifled, 2 Pillow Min 3 Cluster Storm Rifled	i Directional
	5 Mini Storm Rotator, 1 Power Storm Twister, 2 Pillow Mini Directional	
	1 Power Storm Rifled, 2 Mini Storm Rifled	
	3 Mini Storm Rotator, 4 Mini Storm Directional, 2 Pow	er Storm Twister
Seat 6 Jets		
Footwell (7)		
Massage Selectors	2	
Special Features		
Water Management System		
LED Lighting	ClearZone Pro Water Purification System	
Optional		
	Grystar F X Adobe Tan, Stoneridge Grey, Mayan Brown,	
	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midi	night Manle
	Moonstone, UltraLife®, Sand, Sunstone, Smoked Ma	
- 1013110 001010	Marble, Desert Stone	, 5.00 10602, 0103
Headrests	3 (1 standard; 2 Jet Therapy Pillow)	
Water Feature	Water fountain with independent flow rate (on or off) a	adjustment; powered by
	pump 1	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
Electrical Requirements:	North America (60 Hz): 240 VAC@30A or 40A	
·	Export (50 Hz): 230 VAC@1x32A, 2x16A, 3x16A or suitably rated circuit	
	breaker to comply with local electrical codes. Certain countries may require	
	dual power inputs	
Warranty*	North America (60 Hz): Lifetime for UltraLife Shell Surface, 5 Years Acrylic Shell	
	Surface, 3 Years Plumbing, 3 Years Equipment and Controls, 7 Years Cabinet,	
	1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon,	
	1 Year Lights, 6 Months for Stereo;	.
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic Shell	
	Surface, 2 Years Plumbing, 2 Years Equipment and Controls, 2 Years	
	Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for	
Audio System (Ontional)	Jet Escutcheon, 1 Year Lights, 6 Months for Stered	
Audio System (Optional)	Stereo system with Bluetooth capability; 2 premium s	peakers and a subwooter

^{*(}See Warranty Document for Specific Details)

Massage Selector Diagram

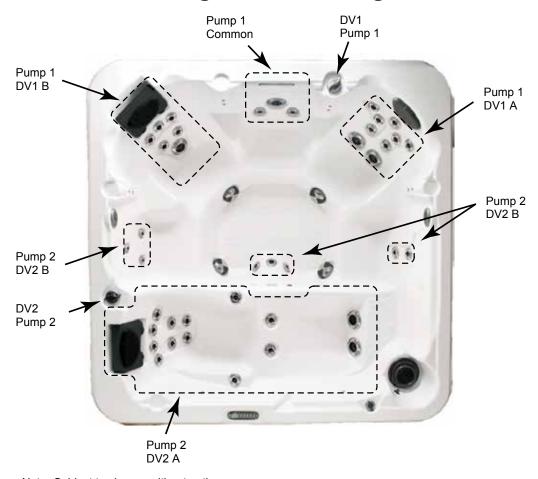

Note: Subject to change without notice.

1. All drains and skimmer tied in common loop

Legend:

DV1 = Diverter Valve 1

DV1 A = Diverter Valve 1 (A position clockwise)

DV1 B = Diverter Valve 1 (B position counter clockwise)

DV1 C = Diverter Valve 1 (C neutral position)

DV2 = Diverter Valve 2

DV2 A = Diverter Valve 2 (A position clockwise)

DV2 B = Diverter Valve 2 (B position counter clockwise)

DV2 C = Diverter Valve 2 (C neutral position)

Spa Operation Subject to Change without Notice

Seat Depths

1 = 26.00" (66.04 cm) 7 = 31.00" (78.74 cm)

2 = 21.00" (53.34 cm) 3 = 27.00" (68.58 cm)

4 = 24.00" (60.96 cm)


5 = 29.00" (73.66 cm)

6 = 25.00" (63.50 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



Jet Designation

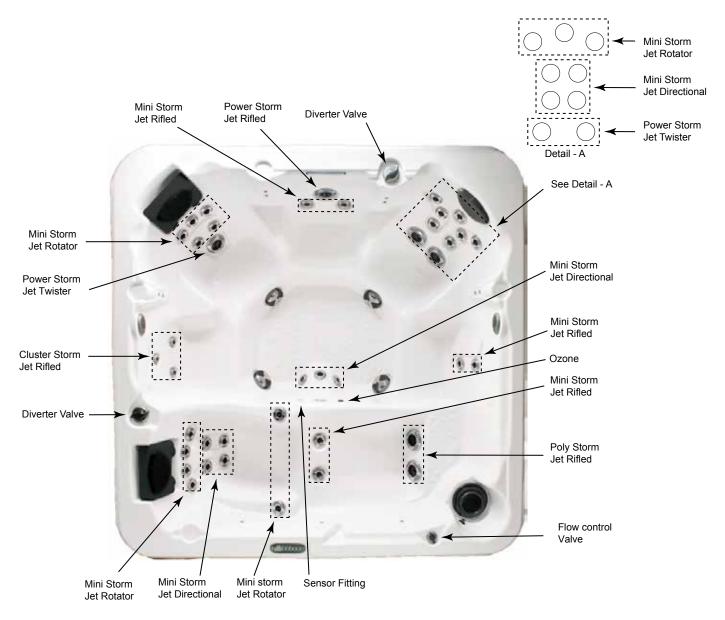

Dimensions/Operation/Specifications are Subject to Change Without Notice

44 Total Jets (textured)



Poly Storm Rifled (2)



Cluster Storm Rifled (3)



Mini Storm Rifled (6)

Total Jets



Mini Storm Directional (11)



Mini Storm Rotator (14)




Power Storm Rifled (1)



Power Storm Twister (3)



Jet Therapy Pillow Mini Directional (4)

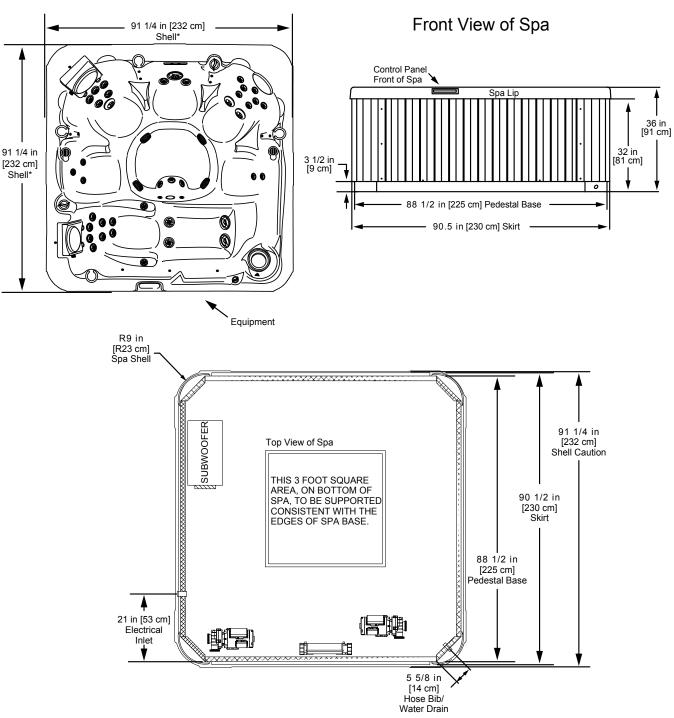

Note:

- 1. Subject to change without notice.
- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" clearances on the backside of the spa.
- 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.

STOP

*Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. <u>If site planning is critical to such tolerances</u>, be sure to measure your actual spa.