

Aurora™

Seating Capacity	5-6 Adults
Dimensions	83 1/4" x 83 1/4" x 35 1/2", (211 cm x 211 cm x 90 cm)
Corner Radius	16" (41 cm)
Dry Weight	670 lbs (304 kg)
Filled Weight (Average Fill)	3,086 lbs (1,400 kg)
Water Capacity (Average Fill)	290 US gallons (1,098 Liters)
Shipping Weight	670 lbs (304 kg)
Export Shipping Weight:.....	721 lbs (327 kg)
Electronic Controls	D1 SmartHUB™ full color glass touch control panel; access to control jets, temperature, settings and maintenance schedule
Pump 1	North America (60 Hz): 2-Speed, 4.0 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Pump 2	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):	1-Speed, 2.0 HP continuous
Circulation Pump	Yes
Fountain Pump	Yes
Filtration (factory default)	24/7 Filtration (Purge Cycles 2 x 10 minutes)
Total VCR Jets	33
Seat 1 Jets	2 Power Storm Dual Rotator, 2 Mini Storm Rotator, 2 Mini Storm Directional
Seat 2 Jets	1 Power Storm Multi Port
Seat 3 Jets	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 2 Power Storm Rotator, 4 Power Storm Directional
Seat 4 Jets	1 Power Storm Multi Port
Seat 5 UltraLounge Jets	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 2 Power Storm Dual Rotator, 2 Power Storm Rotator, 2 Euro Cluster Storm Dual Rotator, 4 Euro Cluster Storm Directional, 2 Power Storm Directional
Footwell (6)	1 Typhoon
Massage Selectors	1
Special Features	Tactile Therapy, Spa Status Light, 2 Flex Therapy Pillow, UltraLounge, Aux control
Water Management System	UltraPure System; Two 75 ft ³ filter cartridge; 8" Weir
LED Lighting	Liquid FX
Optional	Exterior Lights
Synthetic Cabinet Colors	Adobe Tan, Stoneridge Grey, Mayan Brown
Terracina Cabinet (Optional)	Driftwood, Cherry, Summer Pine, Vintage Cedar, Midnight Maple
Acrylic Colors	Moonstone, UltraLife, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone
Headrests	3 (1 standard; 2 Flex Therapy Pillow)
Water Feature	Fountain with independent flow rate (on or off) adjustment; powered by the fountain pump
Heater	2.1, 3.4, 5.5 kW
Export (50Hz)	2.1, 3.4, 5.5 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 40A or 50A Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs
Warranty*	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, Lifetime for EnviroTect™ Cabinet, 7 Years for Terracina™ Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year for Stereo; Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo
Audio System (Optional)	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer
Wi-Fi (Optional)	D1 Connect App




**Optional
escutcheon jets**

*(See Warranty Document for Specific Details)

Aurora

Massage Selector Diagram

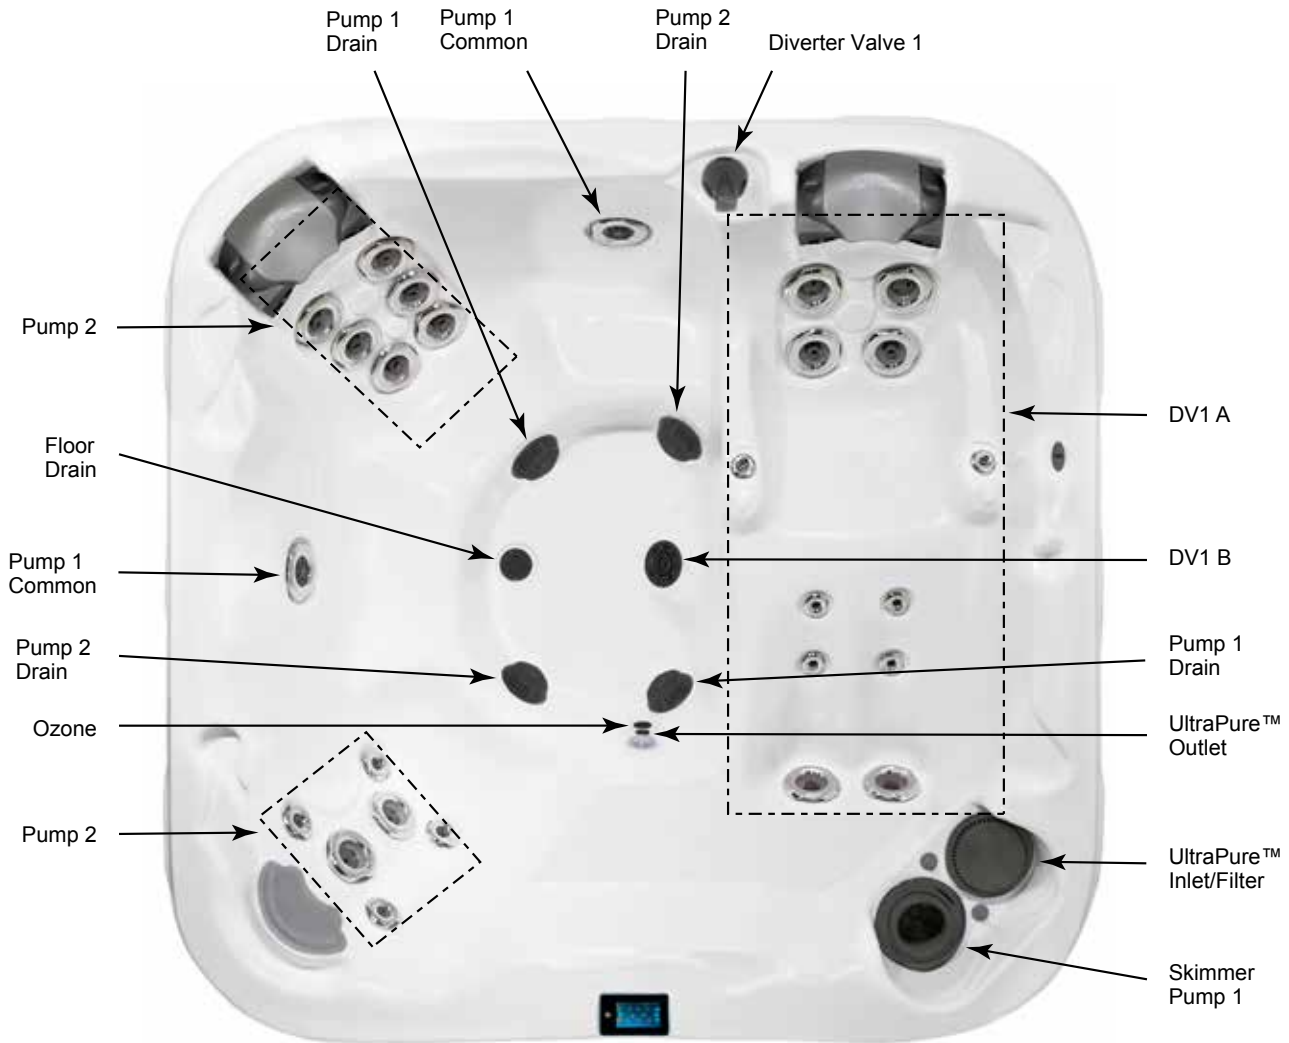

DV1 A = Diverter Valve 1 (A Position Clockwise)
 DV1 B = Diverter Valve 1 (B Position Counterclockwise)
 DV1 C = Diverter Valve 1 (Neutral Position)

Spa Operation Subject to Change without Notice

Seat Depths

- 1 = 27.00" (68.58 cm)
- 2 = 26.00" (66.04 cm)
- 3 = 29.00" (73.66 cm)
- 4 = 26.00" (66.04 cm)
- 5 = 23.00" (58.42 cm)
- 6 = 15.00" (38.10 cm)

- 7 = 32.00" (81.28 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Aurora

Jet Designation

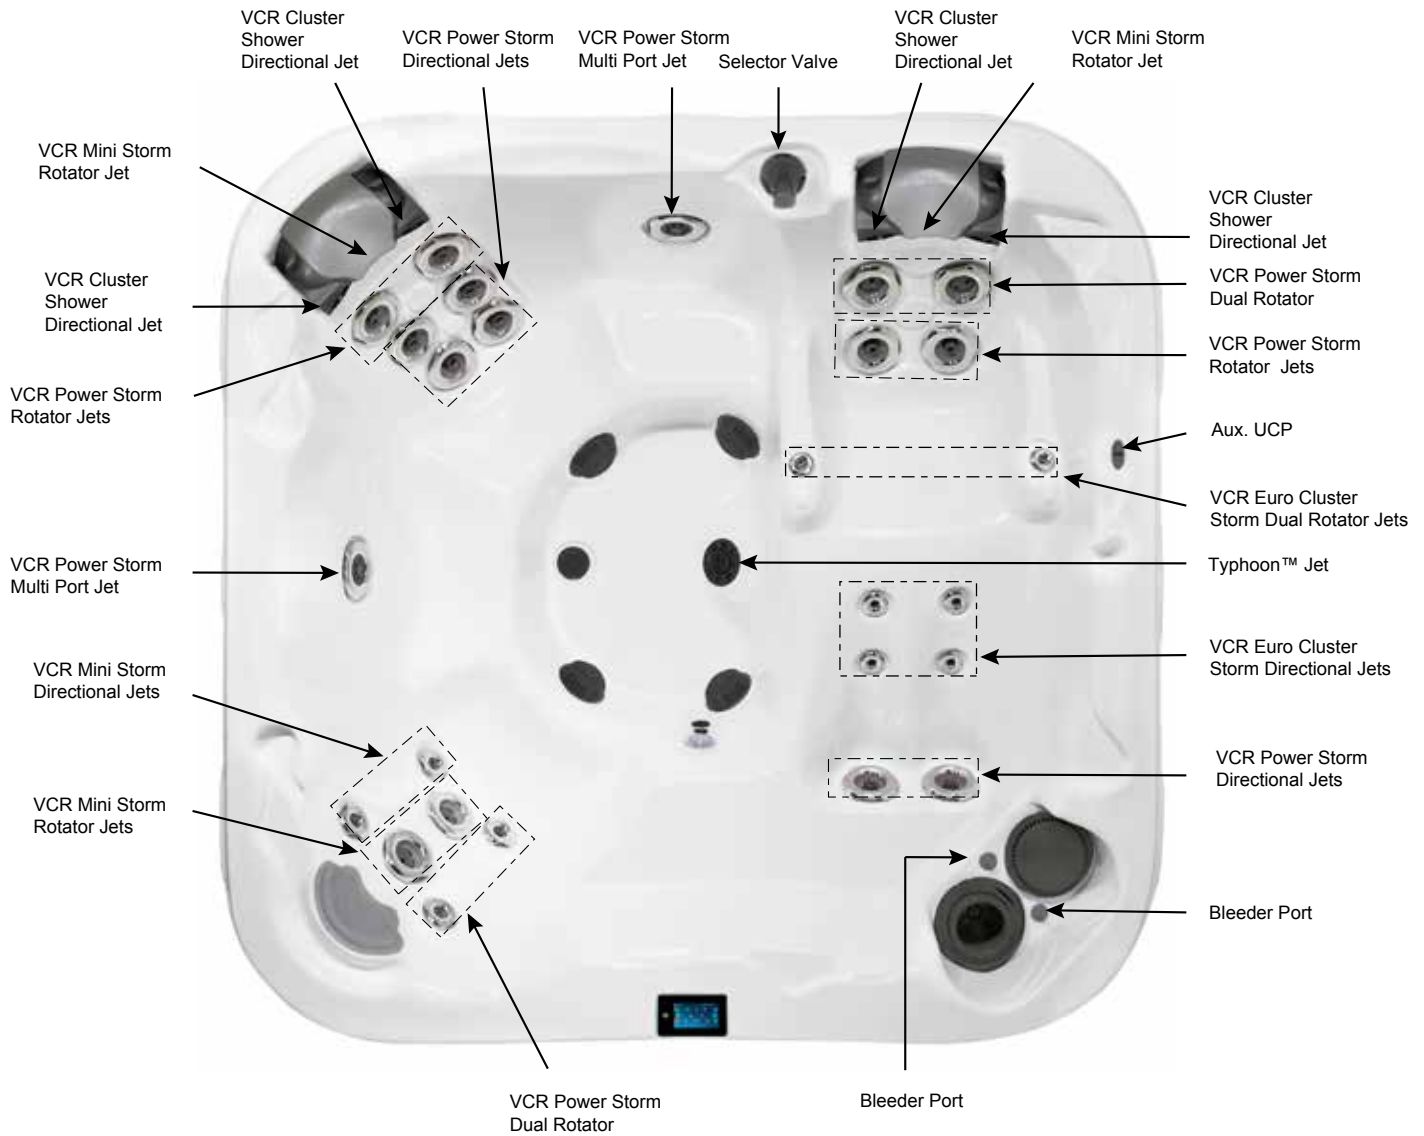




Dimensions/Operation/Specifications are Subject to Change Without Notice

33 Total Jets




Total Jets

Aurora

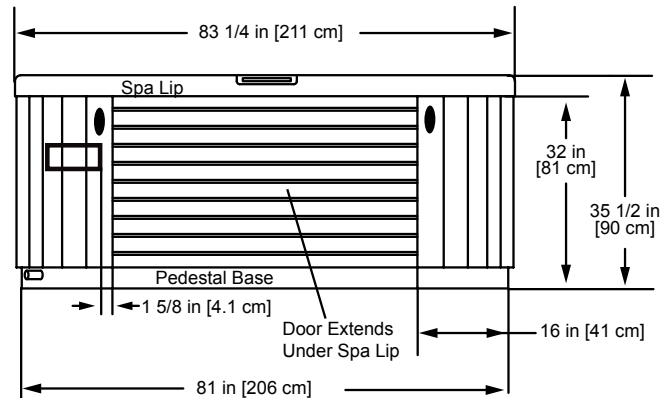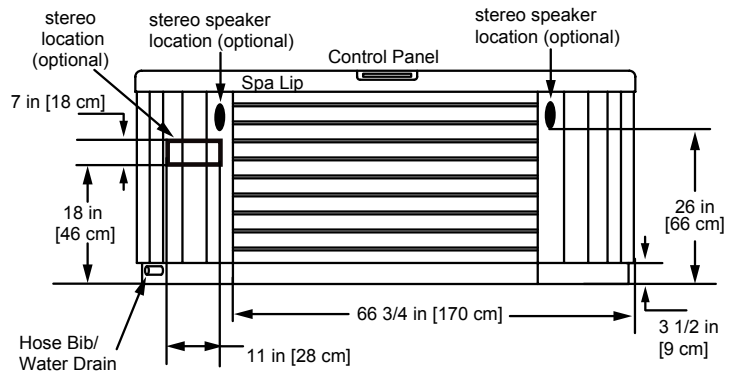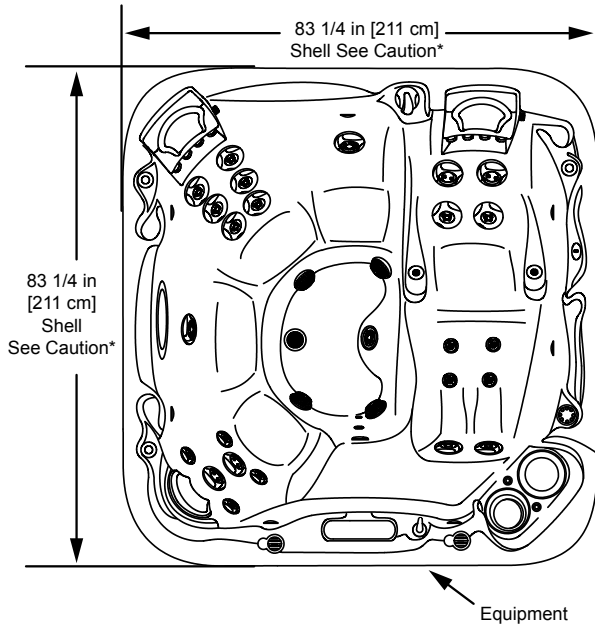

***Caution:**

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

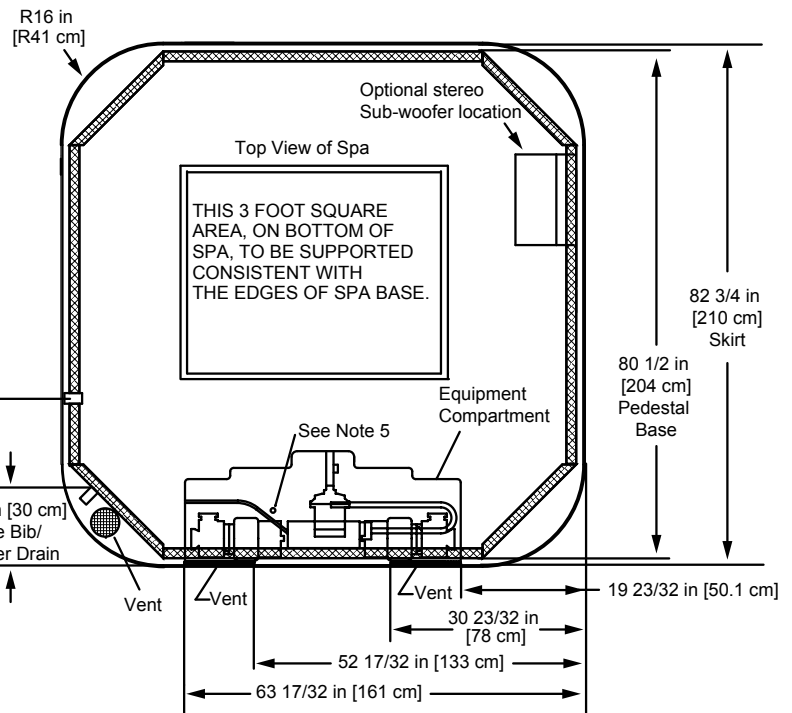

- Note:
1. Subject to change without notice.
 2. Engineering specs may differ slightly from brochure.
 3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
 5. This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa. Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance $\pm 0.5"$ [1.27 cm]).