
Soating Canacity	7 Adulte	
Seating Capacity Dimensions		1-1
	(010 010 01	00 :.
Corner Radius	9" (23 cm)	···· 4 ···
Dry Weight		0 0
Filled Weight (Average Fill)		··· ··
Water Capacity (Average Fill)	315 US gallons (1.192 Liters)	2 7 0
Shipping Weight	590  lbs (268  kg)	
Export Shipping Weight:		0 6
Electronic Controls	Programmable digital panel with LED readout	8.
	North America (60 Hz): 2-Speed, 3.6 HP	
	break, 2.0 HP continuous, 48 Frame	
	2-Speed, 2.0 HP continuous	
	North America (60 Hz): 1-Speed, 3.6 HP break,	
	2.0 HP continuous, 48 Frame	Optional
Export (50 Hz):	1-Speed, 2.0 HP continuous	escutcheon jets
Circulation Pump	. Optional with ClearZone Pro package	
Filtration (factory default)		
Heater		
Export (50Hz)		
Total @Home Jets		
Seat 1 Jets	3 Cluster Storm Directional, 2 Mini Storm Rotato	pr
Seat 2 Jets		
Seat 3 Jets	2 Power Storm Massage, 1 Power Storm Directi	onal Twirl, 2 Mini Storm
	Rotator	
Seat 4 Jets	2 Mini Storm Directional	
Seat 5 Jets		
	. 4 Cluster Storm Directional, 2 Power Storm Twister	
Footwell (7)		
Massage Selectors		
Special Features		
Water Management System		
	ClearZone® Pro Water Purification System	
	One multi Color LED footwell light	
Optional		
	Adobe Tan, Stoneridge Grey, Mayan Brown	Midnight Manla
	Driftwood, Cherry, Summer Pine, Vintage Cedar	
	. UltraLife, Moonstone, Sand, Sunstone, Smoked Marble, Blue Topaz, Gray Marble, Desert Stone	
Headrests		
	• Water fountain with independent flow rate (on or	off) adjustment: nowered
Water r catare	by pump 1	on) adjustment, powered
Electrical Requirements:	North America (60 Hz): 240 VAC@30A or 40A	
	Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x10	6A. 3x16A or suitably
	rated circuit breaker to comply with local ele	
	countries may require dual power inputs	
Warranty*	. North America (60 Hz): Lifetime for UltraLife Shell Surface, 5 Years Acrylic	
-	Shell Surface, 3 Years Plumbing, 3 Years Equipment and Controls, 7 Years	
	Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for	
	Jet Escutcheon, 1 Year Lights, 6 Months for Stereo;	
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic	
	Shell Surface, 2 Years Plumbing, 2 Years Equipment and Controls,	
	2 Years Cabinet, 1 Year Water Purification System, 2 Years for Jet	
	Insert, 1 Year for Jet Escutcheon, 1 Year Ligh	
Audio System (Optional)	Stereo system with Bluetooth capability; 2 premi	um speakers and a
	subwoofer	

#### **Massage Selector Diagram**

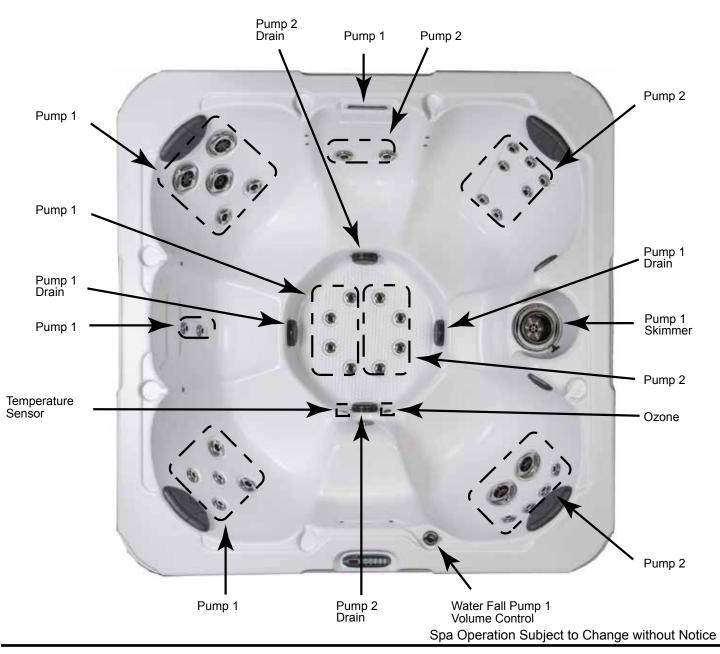

## **Seat Depths**


1 = 26.00" (66.04 cm) 2 = 26.00" (66.04 cm) 3 = 28.00" (71.12 cm) 4 = 26.00" (66.04 cm) 5 = 28.00" (71.12 cm) 6 = 27.00" (68.58 cm) 7 = 16.00" (40.64 cm) 8 = 30.00" (76.20 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

### **Jet Designation**

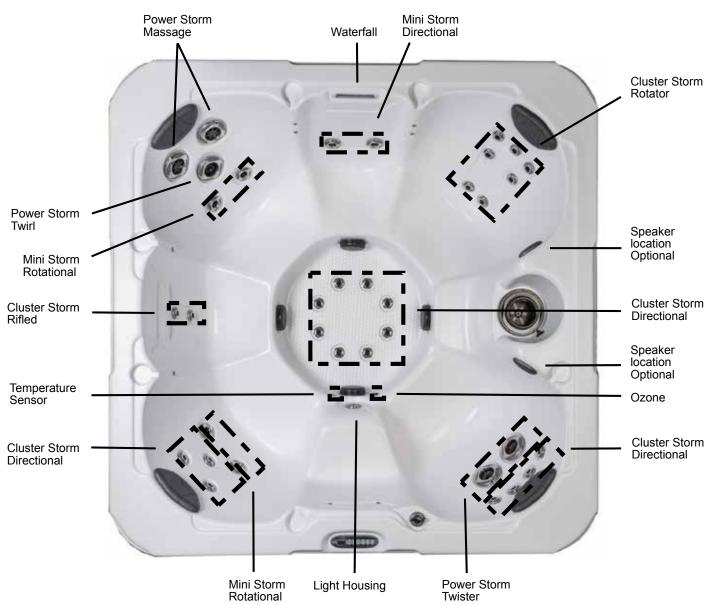

Dimensions/Operation/Specifications are Subject to Change Without Notice

#### 35 Total Jets (textured)





Cluster







(7) Power Storm

Massage

(2)


### **Total Jets**









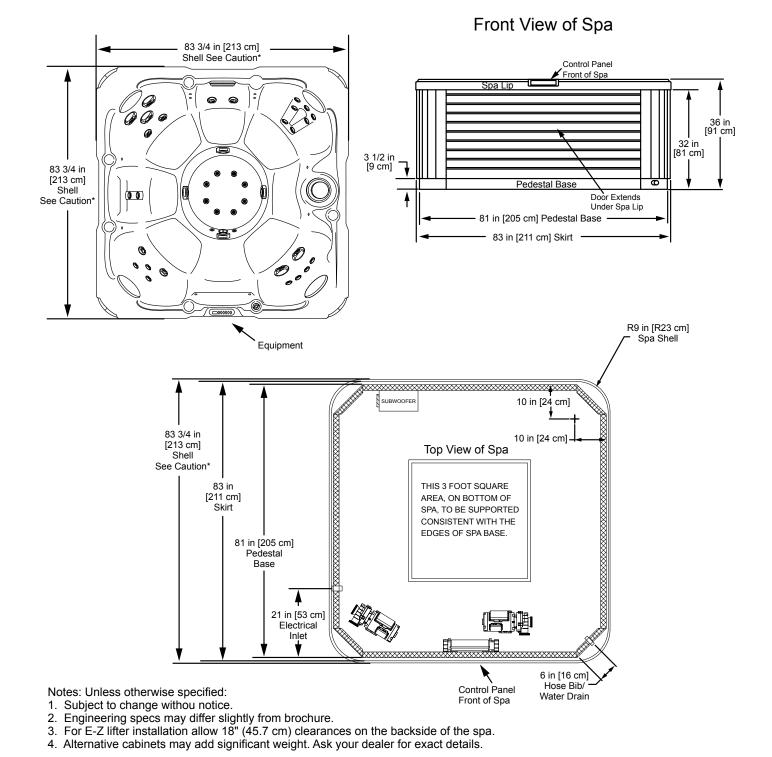

Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).

to such tolerances, be sure to measure your actual spa.

\*Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical