
Seating Capacity		
Dimensions	83.75" x 83.75" x 36",	00
	(213 cm x 213 cm x 91 cm	60.
Corner Radius	9" (23 cm)	4
Dry Weight	590 lbs (268 kg)	8 6
Filled Weight (Average Fill)	3.090 lbs (1.402 kg)	00
Water Capacity (Average Fill)		2 7 6
Shipping Weight	590 lbs (268 kg)	9 0
Export Shipping Weight:	640 lbs (290 kg)	
	Programmable digital panel with LED readout	A:0 0
		1:0 U
Pump 1	North America (60 Hz): 2-Speed, 3.6 HP break,	
E (/E0.11.)	2.0 HP continuous, 48 Frame	
	2-Speed, 2.0 HP continuous	1
Pump 2	North America (60 Hz): 1-Speed, 3.6 HP break,	
	2.0 HP continuous, 48 Frame	
Export (50 Hz):	1-Speed, 2.0 HP continuous	Optional
Circulation Pump	Optional with ClearZone Pro package	· · ·
Filtration (factory default)	2 Cycles for a total of 2 hours	escutcheon jets
Heater		
Export (50Hz)		
Total @Home Jets	34	
Seat 1 Jets	6 Cluster Storm Directional, 2 Power Storm Twister,	2 Cluster Storm Rifled
Seat 2 Jets	2 Cluster Storm Rifled	, 2 oldster otorm raned
Soat 3 lots	2 Power Storm Massage, 1 Power Storm Twirl,	
Seat 5 Sets	2 Mini Storm Rotator	
Soot 4 loto	1 Cluster Storm Rifled, 2 Mini Storm Directional	
Seat 5 Jets		
Seat 6 Jets		
Footwell (7)		
Massage Selectors		
Special Features		
Water Management System		
	ClearZone® Pro Water Purification System	
LED Lighting	One multi Color LED footwell light	
Optional	Crystal FX	
Synthetic Cabinet Colors	Adobe Tan, Stoneridge Grey, Mayan Brown,	
	Driftwood, Cherry, Summer Pine, Vintage Cedar, M	idnight Maple
	Moonstone, UltraLife, Sand, Sunstone, Smoked Ma	
•	Desert Stone	, 11 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,
Headrests		
	Water fountain with independent flow rate (on or off	adjustment: nowered by
TTALGI I GALUIG	pump 1	, adjustilient, powered by
Floatrical Poquiroments:	North America (60 Hz): 240 VAC@30A or 40A	
Electrical Requirements.		
	Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may	
		des. Certain countries may
• •	require dual power inputs	
Warranty*	North America (60 Hz): Lifetime for UltraLife Shell Surface, 5 Years Acrylic Shell	
	Surface, 3 Years Plumbing, 3 Years Equipment and Controls, 7 Years Cabinet,	
	1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon,	
	1 Year Lights, 6 Months for Stereo;	
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic Shell	
	Surface, 2 Years Plumbing, 2 Years Equipment and Controls, 2 Years	
	Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet	
	Escutcheon, 1 Year Lights, 6 Months for Stereo	
Audio System (Ontional)	Stereo system with Bluetooth capability; 2 premium	sneakers and a subwoofer
Audio Oysteili (Optioliai)	Oto o system with bluetooth capability, 2 premium	

^{*(}See Warranty Document for Specific Details)

Massage Selector Diagram

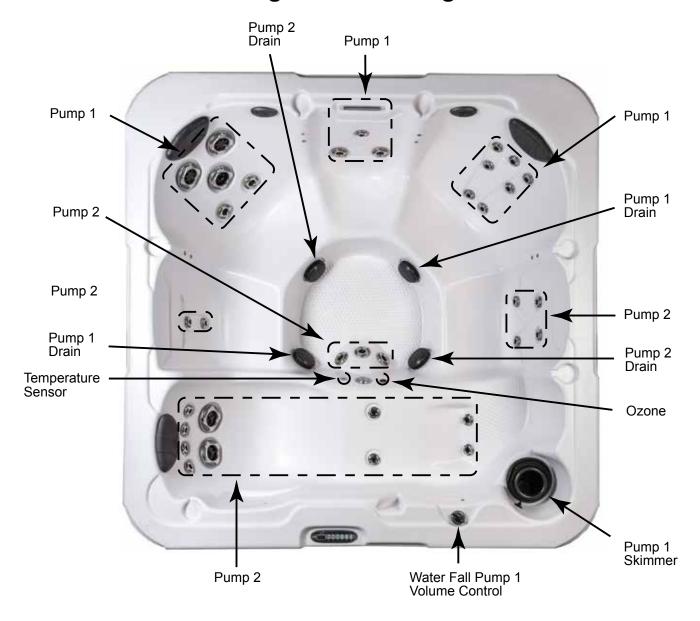

Spa Operation Subject to Change without Notice


Seat Depths

1 = 24.00" (60.96 cm) 7 = 30.00" (76.20 cm) 2 = 26.00" (66.04 cm) 3 = 28.00" (71.12 cm) 4 = 26.00" (66.04 cm)

5 = 28.00" (71.12 cm) 6 = 26.00" (66.04 cm) Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



Jet Designation

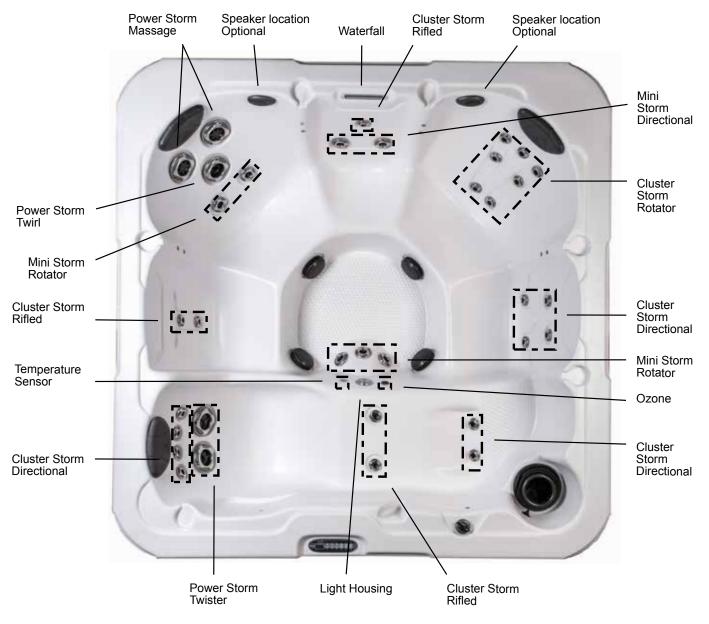

Dimensions/Operation/Specifications are Subject to Change Without Notice

34 Total Jets (textured)



Cluster Storm Directional









Power Storm Massage (2)

Cluster

Pulsator

Storm

(7)

Total Jets



Cluster Storm Rifled






Storm Twister (2)





Mini Storm Rotator (5)

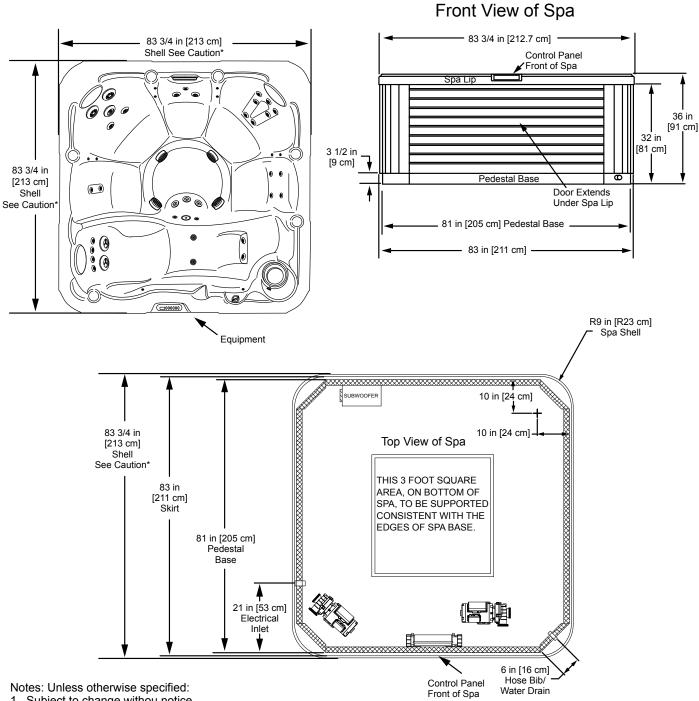

- 1. Subject to change withou notice.
- Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.7 cm) clearances on the backside of the spa.
- 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.

*Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.