
Seating Capacity	. 8-9 Adults	200
Dimensions	. 92" x 110" x 41 1/2".	
		100
Corner Radius	(234 GH X 279 GH X 100 GH)	a
Corner Radius	. 15" (38 cm)	6
Dry Weight	. 966 lbs (438 kg)	(00)
Filled Weight (Average Fill)	5 907 lbs (2 679 kg)	
Water Canacity (Average Fill)	502 US college (2.241 Liters)	AA
Water Capacity (Average Fill)	. 592 US gailoris (2,241 Liters)	8 6
Shipping Weight	. 1,110 lbs (503 kg)	
Export Shipping Weight:	. 1.160 lbs (526 kg)	
Electronic Controls	. D1 SmartHUB™ full color glass touch control	
Electronic Controls		0
	panel; access to control jets, temperature,	0
	settings and maintenance schedule	3
Dumn 1	North America (60 Hz): 2-Speed, 3.6 HP break,	00_
rump I	. Notiti Afficia (00 fiz). 2-Speed, 5.0 fir break,	
	2.5 HP continuous, 48 Frame	
Export (50 Hz):	. 2-Speed. 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 3.6 HP break,	
rump 2	O. F. L.D. a satismana 40 France	
	2.5 HP continuous, 48 Frame	Optional
Export (50 Hz):	.1-Speed, 2.0 HP continuous	· -
Pump 3	North America (60 Hz): 1-Speed, 3.6 HP break,	escutcheon jets
. any v	2.5 LD continuous 40 Frame	
	2.5 HP continuous, 48 Frame	
Export (50 Hz):	.1-Speed, 2.0 HP continuous	
Circulation Pump	Yes	
Fountain Pump	Voc	
Funtani Funip	. 1 CO	
	.24/7 Filtration (Purge Cycles 2 x 10 minutes)	
Total VCR Jets	.60	
Seat 1 Jets	.2 Euro Cluster Storm Dual Rotator (on side of wall)	
Coat 2 late	1 Dillow Mini Ctorm Detator 2 Dillow Chater Chawer Dir	ractional E Mini Ctarm Datatar
Seat 2 Jets	.1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Dir	ectional, 5 Mini Storm Rotator,
	1 Power Storm Rotator, 2 Euro Cluster Storm Dual Rota	ator, 2 Euro Cluster Storm
	Directional	
Soat 3 late	. 1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Dir	rectional 3 Power Storm Dual
Seat 3 Jets	Deteter 4 Mini Otenne Deteter 4 Franc Objeter Otenne Dur	- Detete - O Francisco Director Otense
	Rotator, 4 Mini Storm Rotator, 4 Euro Cluster Storm Dua	al Rotator, 2 Euro Cluster Storm
	Directional	
Seat 4 Jets	.4 Mini Storm Rotator, 1 Power Storm Dual Rotator, 1 Ty	nhoon (side wall)
Coat F loto	2 Power Storm Rotational, 2 Mini Storm Rotator	pridori (side waii)
	.1 Power Storm Rotator, 2 Euro Cluster Storm Direct	
Seat 7 Jets	. 1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 2 Power Storm	
	Rotator, 4 Power Storm Directional, 6 Mini Storm Rotato	
Facturall (0)	4 Turk and)i
Footwell (8)		
Massage Selectors	.2	
Special Features	. Tactile Therapy, Spa Status Light, 3 Flex Therapy Pillow	. Aux Control
	UltraPure System; Two 75 ft filter cartridge; 8" Weir	, , , , , , , , , , , , , , , , , , , ,
LED Lighting	Liquia FX	
Optional	. Exterior Lights	
Synthetic Cabinet Colors	. Adobe Tan, Stoneridge Grey, Mayan Brown	
Torrecine Cobinet (Ontional)	Driftwood, Summer Pine, Vintage Cedar, Midnight Maple	•
	. Moonstone, UltraLife, Sand, Sunstone, Smoked Marble, Gray Marble, Desert Stone	
		, Gray Marble, Desert Stone
Headrests	.3 Flex Therapy Pillow	
	Rainbow Fountain and Babbling Brook with diverter and	I flow rate valves: nowered by
		rate varies, powered by
11. 4	the fountain pump	
Heater	. 2.1, 3.4, 5.5 kW	
Export (50Hz)	. 2.1. 3.4. 5.5 kW	
Electrical Poquirements:	North America (60 Hz): 240 VAC@40A or 50A	
Liectrical Requirements		
	Export (50 Hz): 230 VAC@1x32A, 2x16A, 3x16A or si	
	to comply with local electrical codes. Certain countr	ries may require dual power
	inputs	, , , , , , , , , , , , , , , , , , , ,
\A/a	North America (CO III), I ifatimes for I litral ifa Chall Confe	an 7 Varus Armilia Chall
warranty"	North America (60 Hz): Lifetime for UltraLife Shell Surfa	
	Surface, 5 Years Plumbing, 5 Years Equipment and Cor	ntrols, Lifetime for EnviroTect
	Cabinet, 7 Years for Terracina Cabinet, 1 Year Water Pr	
	Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1	
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface,	
	5 Years Plumbing, 5 Years Equipment and Controls, 5 Years for EnviroTect	
	Cabinet, 2 Years for Terracina Cabinet, 1 Year Water Purification System,	
	2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Y	
Audio System (Optional)	Fully Integrated Stereo System with Bluetooth capability	y, 4 premium speakers and a
• ,	subwoofer	•

^{*(}See Warranty Document for Specific Details)

subwoofer

Massage Selector Diagram

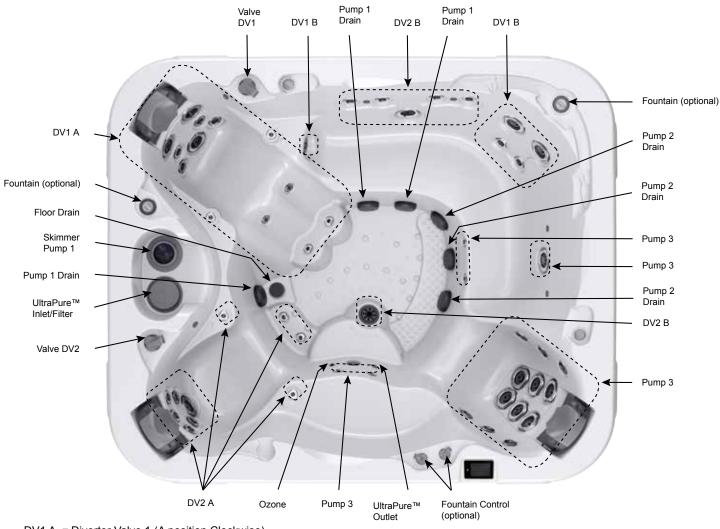

DV1 A = Diverter Valve 1 (A position Clockwise)

DV1 B = Diverter Valve 1 (B Position Counter Clockwise)

DV2 A = Diverter Valve 2 (A position Clockwise)

DV2 B = Diverter Valve 2 (B position Counter Clockwise)

Spa Operation Subject to Change without Notice

Seat Depths

1 = 17.00" (43.18 cm) 7 = 27.50" (69.85 cm) 2 = 17.00" (43.18 cm) 8 = 27.33" (69.42 cm) 3 = 27.33" (69.42 cm) 9 = 29.75" (75.57 cm)

4 = 28.50" (72.39 cm) 10 = 38.50" (97.79 cm)


5 = 26.00" (66.04 cm)

6 = 26.20" (66.55 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



Jet Designation

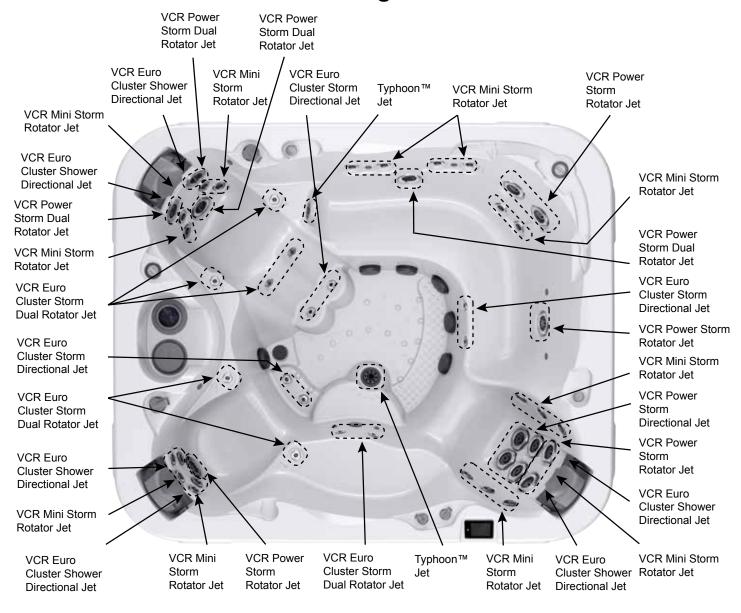

Dimensions/Operation/Specifications are Subject to Change Without Notice

60 Total Jets



Mini Storm Rotator (21)





Power Storm Rotator (6)



Typhoon Jet (2)

Total Jets



Power Storm Dual Rotator (4)



Power Storm Directional (4)




Cluster Storm Directional (6)



Flex Therapy Pillow (3)





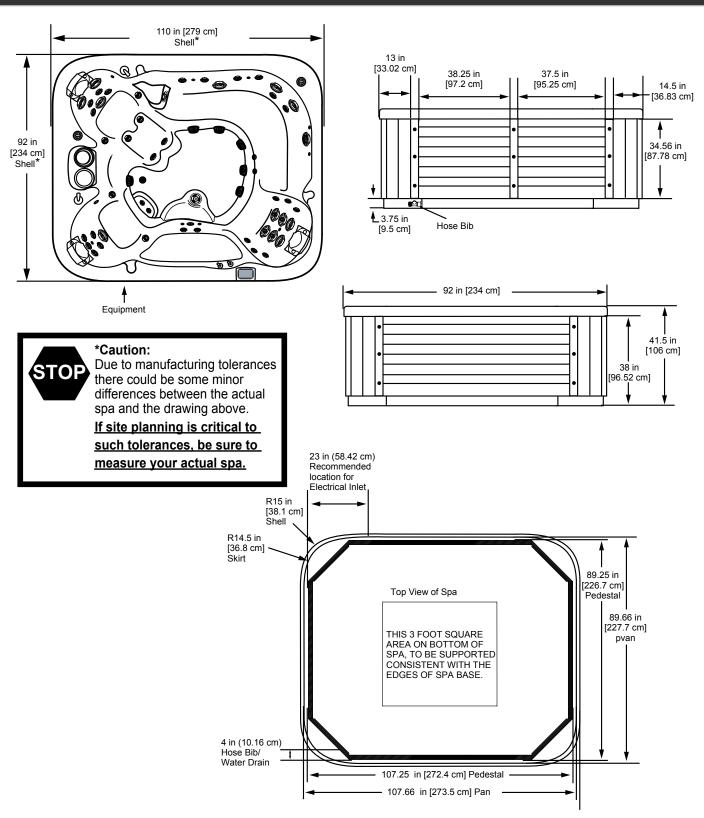

Note: 1. Subject to change without notice.

- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
- 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
- This is the approximate location for drilling a hole if you must bring the power line in through the bottom of the spa.Be careful not to puncture a plumbing line inside the equipment compartment (drill from the inside compartment out).

Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).