Secting Consolty	7 Adulto		
Seating Capacity Dimensions			
	(222 cm y 222 cm y 01 cm)	00	
Corner Radius	9" (23 cm)	· A	
Dry Weight		8 6	
Filled Weight (Average Fill)			
Water Capacity (Average Fill)	375 US gallons (1 420 Liters)	11	
Shipping Weight	730 lbs (331 kg)	2 7 9	
Export Shipping Weight:	780 lbs (354 kg)		
Electronic Controls	Programmable digital panel with LED readout		
	North America (60 Hz): 2-Speed, 4.0 HP break,	. 0	
•	2.5 HP continuous, 48 Frame		
Export (50 Hz):	2-Speed, 2.0 HP continuous		
Pump 2	North America (60 Hz): 1-Speed, 4.0 HP break,		
	2.0 HP continuous. 48 Frame		
Export (50 Hz):	1-Speed, 2.0 HP continuous	Ontional	
Circulation Pump	Optional with ClearZone Pro package	Optional	
Filtration (factory default)		escutcheon jets	
Heater	4.0 kW	,, , , , , ,	
Export (50Hz)	3.0 kW		
Total @Home Jets	45		
Seat 1 Jets	2 Mini Storm Directional, 1 Power Storm Twister,		
	2 Mini Storm Rifled		
	4 Cluster Storm Rifled, 1 Turbo Jet (sidewall)		
	2 Power Storm Rifled, 4 Mini Storm Rifled		
	1 Mini Storm Rifled, 2 Cluster Storm Directional		
Seat 5 Jets	4 Mini Storm Rotator, 2 Mini Storm Directional, 2 Po 2 Pillow Mini Directional	wer Storm Twirl,	
Soat 6 lots	5 Mini Storm Rotator, 1 Power Storm Twister, 2 Pillo	w Mini Directional	
Footwell (7)	8 Cluster Storm Directional		
Massage Selectors			
	2 Jet Therapy Pillow, Tactile Therapy		
Water Management System	One 75 ft filter cartridge 8" Weir		
	ClearZone Pro Water Purification System		
LED Lighting			
Optional			
Synthetic Cabinet Colors	Adobe Tan, Stoneridge Grey, Mayan Brown,		
	Driftwood, Cherry, Summer Pine, Vintage Cedar, Mi	dnight Maple	
	Moonstone, UltraLife, Sand, Sunstone, Smoked Mai		
-	Desert Stone		
Headrests	3 (1 standard; 2 Jet Therapy Pillow)		
Water Feature	Water fountain with independent flow rate (on or off)) adjustment; powered by	
	pump 1		
Electrical Requirements:	North America (60 Hz): 240 VAC@30A or 40A		
	Export (50 Hz): 230 VAC@1x32A, 2x16A, 3x16A c		
	breaker to comply with local electrical codes. Ce	ertain countries may require	
	dual power inputs		
Warranty*			
	Surface, 3 Years Plumbing, 3 Years Equipment and Controls, 7 Years Cabinet,		
	1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet		
	Escutcheon, 1 Year Lights, 6 Months for Stereo;		
	Export (50 Hz): 10 Years for UltraLife Shell Surface, 5 Years Acrylic Shell		
	Surface, 2 Years Plumbing, 2 Years Equipment and Controls, 2 Years		
	Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for		
Audio Sustem (Ontional)	Jet Escutcheon, 1 Year Lights, 6 Months for Stere		
Audio System (Optional)	Stereo system with Bluetooth capability; 2 premium	speakers and a subwooter	

DV1 DV1 Water Feature 12 O'clock Pump 2 Pump 1 Feature Pump 2 Pump 2 seat Turbo Jet Plumbing Configuration DV1 A 1 O'clock 9,11 and 12 seat O' Clock seat 11 O'clock 11 and 12 7 and 9 O' Clock O' Clock seat sea Turbo Jet Pump 1 DV2 A (120) Pump 1 Skimmer 3 O'clock 9 O'clock seat seat Pump 1 DV2 B Turbo Jet Pump 1 DV2 Pump 1 DV2 B 5 O'clock seat Pump 2 7 O'clock seat DV1 B 6 O'clock seat

Massage Selector Diagram

1. All drains and skimmer tied in common loop

Legend:

DV1	=	Diverter Valve 1	

- DV1 A Diverter Valve 1 (A position clockwise) =
- Diverter Valve 1 (B position counter clockwise) DV1 B =
- Diverter Valve 1 (C neutral position) DV1 C =

Spa Operation Subject to Change without Notice


Seat Depths

1 = 16.00" (40.64 cm) 2 = 24.00" (60.96 cm) 3 = 27.00" (68.58 cm) 4 = 25.00" (63.50 cm) 5 = 28.00" (71.12 cm) 6 = 26.00" (66.04 cm)


7 = 16.00" (40.64 cm)8 = 30.00" (76.20 cm)

sent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5"

(1.27 cm).

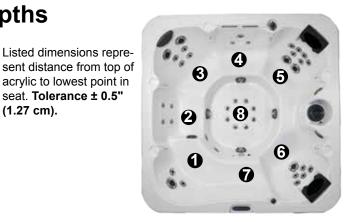

Dimensions/Specifications are Subject to Change Without Notice

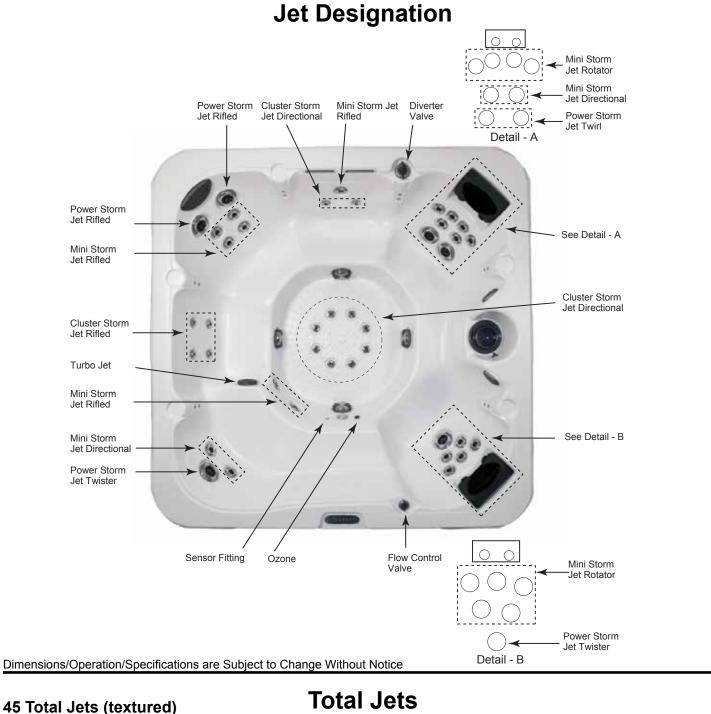





Cluster

Storm







Power

Storm

Twirl

(2)



Mini

(9)

Power

Storm

Twister







Mini

Storm


(1)



Storm Directional



(2)

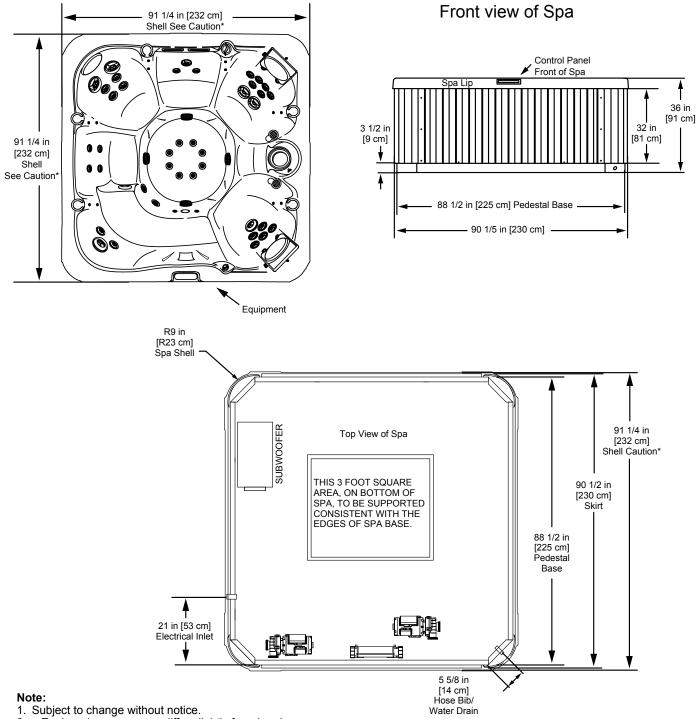

- 2. Engineering specs may differ slightly from brochure.
- 3. For E-Z lifter installation allow 18" (45.7cm) clearance
- on the backside of the spa.



*Caution: Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. If site planning is critical to such tolerances, be sure to measure your actual spa.

Dimensions/Specifications are Subject to Change Without Notice (Tolerance ± 0.5" [1.27 cm]).