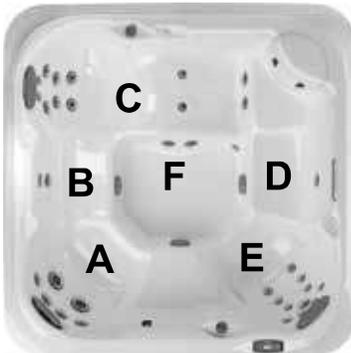


Jacuzzi J-235

Specifications

| | | |
|---|--|---|
| Seating Capacity | 5-6 Adults |  |
| Dimensions | 84" x 84" x 36" (214 cm x 214 cm x 92 cm); For Complete Dimensions, See page 76 | |
| Dry Weight | 726 lbs (330 kg) | |
| Filled Weight (Average Fill) | 3,728 lbs (1,692 kg) | |
| Water Capacity (Average Fill) ... | 360 US gallons (1,363 Liters) | |
| Electronic Controls | Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles | |
| Pump 1 | North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame | |
| Export (50 Hz): | 2-Speed, 2.0 HP continuous | |
| Pump 2 | North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame | |
| Export (50 Hz): | 1-Speed, 2.0 HP continuous | |
| Circulation Pump | No | |
| Total Jets | 34 | |
| Seat A Jets | 4 SL3R Rotational, 2 SL5R Rotational | |
| Seat B Jets | 2 SL3R Rotational | |
| Seat C Jets | 2 SLR Rotational, 2 SL Directional, 8 SL3 Directional | |
| Seat D Jet | 1 SL3R Rotational | |
| Seat E Jets | 2 SLR Rotational, 8 SL Directional, 1 SL3 Directional | |
| Footwell (G) | 2 SL3 Directional | |
| Massage Selectors | None | |
| Air Controls | 2 | |
| Water Management System | One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System | |
| Export (50 Hz): | ClearRay Active Oxygen® System | |
| LED Lighting | LED Lighting System (Interior Surround); Standard Exterior Light | |
| Cabinet Colors | Horizon Gray, Pecan | |
| Acrylic Colors | Platinum, Silver Pearl, Morning Mist, Midnight, Canyon, Monaco (while quantities last) | |
| Headrests | 3 | |
| Waterfall | One independent flow rate (on or off) adjustment; powered by the pump 1 | |
| Heater: | North America (60 Hz): 5.5 kW, High Flow | |
| Export (50 Hz): | High Flow, 2.7 kW | |
| Electrical Requirements: | North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration. | |
| Warranty* | North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets | |
| Special Features (Optional) | SmartTub® Module | |
| Audio System (Optional) | N/A | |

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-235

Operation/Seat Depths



Group A Jets are always on when Pump 1 is running.

Group B Jets are always on when Pump 2 is running.

34 Total Jets




Spa Operation Subject to Change without Notice

Seat Depths

- A = 23.25" (59.06 cm)
- B = 20.75" (52.71 cm)
- C = 24.88" (63.18 cm)
- D = 25.50" (64.77 cm)
- E = 17.50" (44.45 cm)
- F = 21.50" (54.61 cm)

- G = 25.63" (65.09 cm)
- H = 17.00" (43.18 cm)
- I = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance $\pm 0.5"$ (1.27 cm).

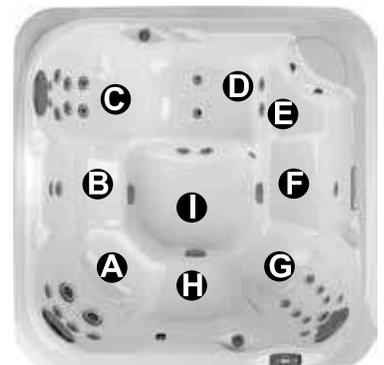


Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-235

Dimensions

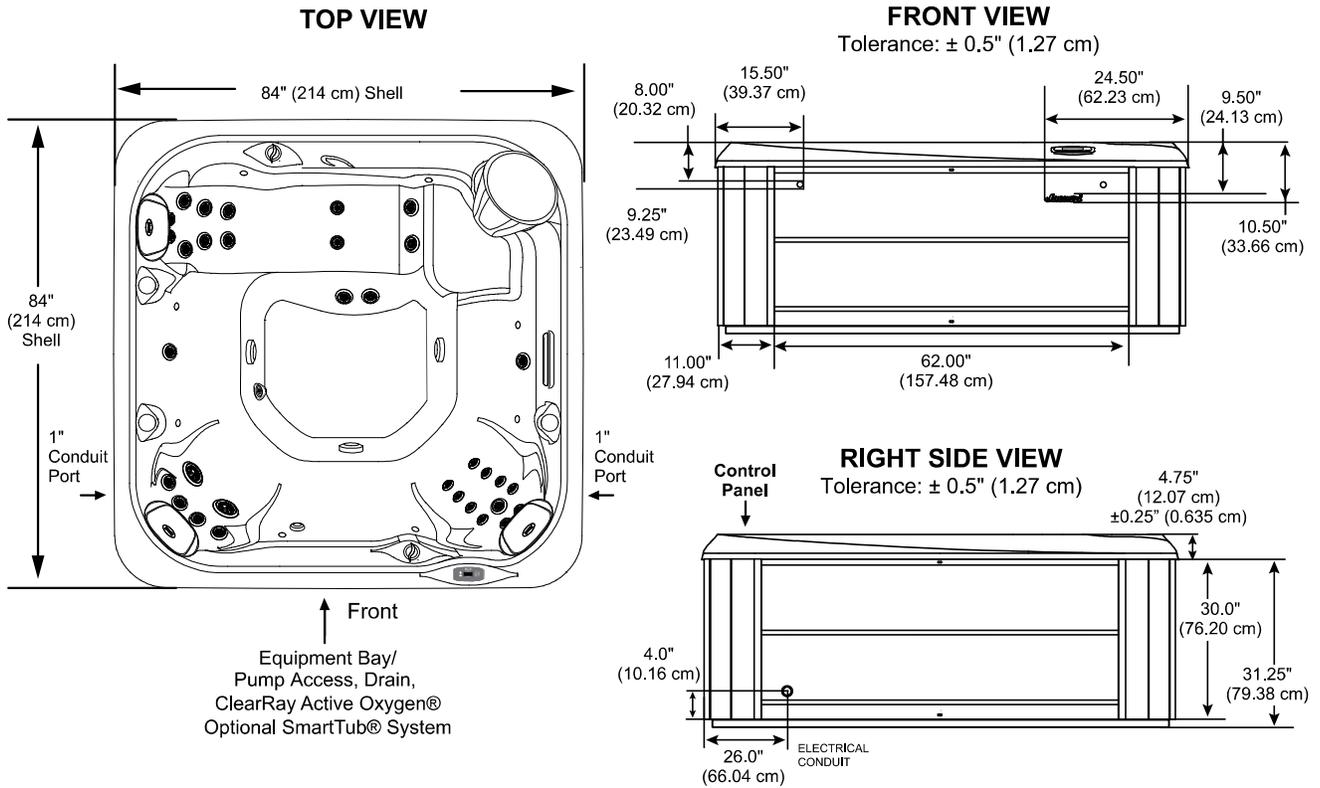

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

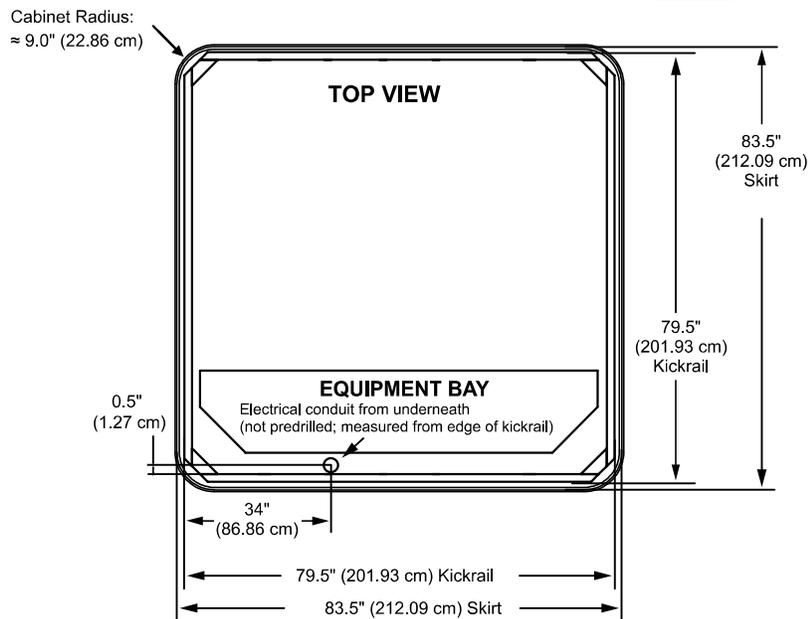

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)