

Jacuzzi J-245

Specifications

Seating Capacity	6-7 Adults	
Dimensions	84" x 84" x 36" (214 cm x 214 cm x 92 cm); For Complete Dimensions, See page 76	
Dry Weight	717 lbs (326 kg)	
Filled Weight (Average Fill)	3,719 lbs (1,687 kg)	
Water Capacity (Average Fill) ...	360 US gallons (1,363 Liters)	
Electronic Controls	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles	
Pump 1	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame	
Export (50 Hz):	2-Speed, 2.0 HP continuous	
Pump 2	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame	
Export (50 Hz):	1-Speed, 2.0 HP continuous	
Circulation Pump	No	
Total Jets	37	
Seat A	2 SL Directional, 8 SLR Rotational, 1 SL3 Directional	
Seat B	1 SL3R Rotational	
Seat C	2 SL Directional, 6 SL3 Directional	
Seat D	2 SL3R Rotational	
Seat E	2 SL3 Directional, 1 SL5R Rotational	
Seat F	2 SL Directional, 4 SL3R Rotational	
Footwell (G)	4 SL Directional	
Massage Selectors	None	
Air Controls	2	
Water Management System	One 50 ft ² filter cartridge on jets pump 1, ClearRay Active Oxygen® System	
Export (50 Hz):	ClearRay Active Oxygen® System	
LED Lighting	LED Lighting System (Interior Surround); Standard Exterior Light	
Cabinet Colors	Horizon Gray, Pecan	
Acrylic Colors	Platinum, Silver Pearl, Morning Mist, Midnight, Canyon, Monaco (while quantities last)	
Headrests	4	
Waterfall	One independent flow rate (on or off) adjustment; powered by the pump 1	
Heater:	North America (60 Hz): 5.5 kW, High Flow	
Export (50 Hz):	High Flow, 2.7 kW	
Electrical Requirements:	North America (60 Hz): 240 VAC@40A, 50A or 60A Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.	
Warranty*	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets	
Special Features (Optional)	SmartTub® Module	
Audio System (Optional)	N/A	

*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-245

Operation/Seat Depths



Group A Jets are always on when Pump 1 is running.


Group B Jets are always on when Pump 2 is running.

Air Control 1:
Opens/Closes Air Inlet to Jet Group A

Waterfall Valve:
Adjust water flow to the waterfall.

Air Control 2:
Opens/Closes Air Inlet to Jet Group B

37 Total Jets



Spa Operation Subject to Change without Notice

Seat Depths

A = 25.88" (65.72 cm)
B = 20.63" (52.39 cm)
C = 26.75" (67.95 cm)
D = 21.63" (54.93 cm)
E = 24.63" (62.55 cm)
F = 18.25" (46.36 cm)

G = 23.38" (59.37 cm)
H = 17.13" (43.50 cm)
I = 30.00" (76.20 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance ± 0.5" (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

Jacuzzi J-245


Dimensions

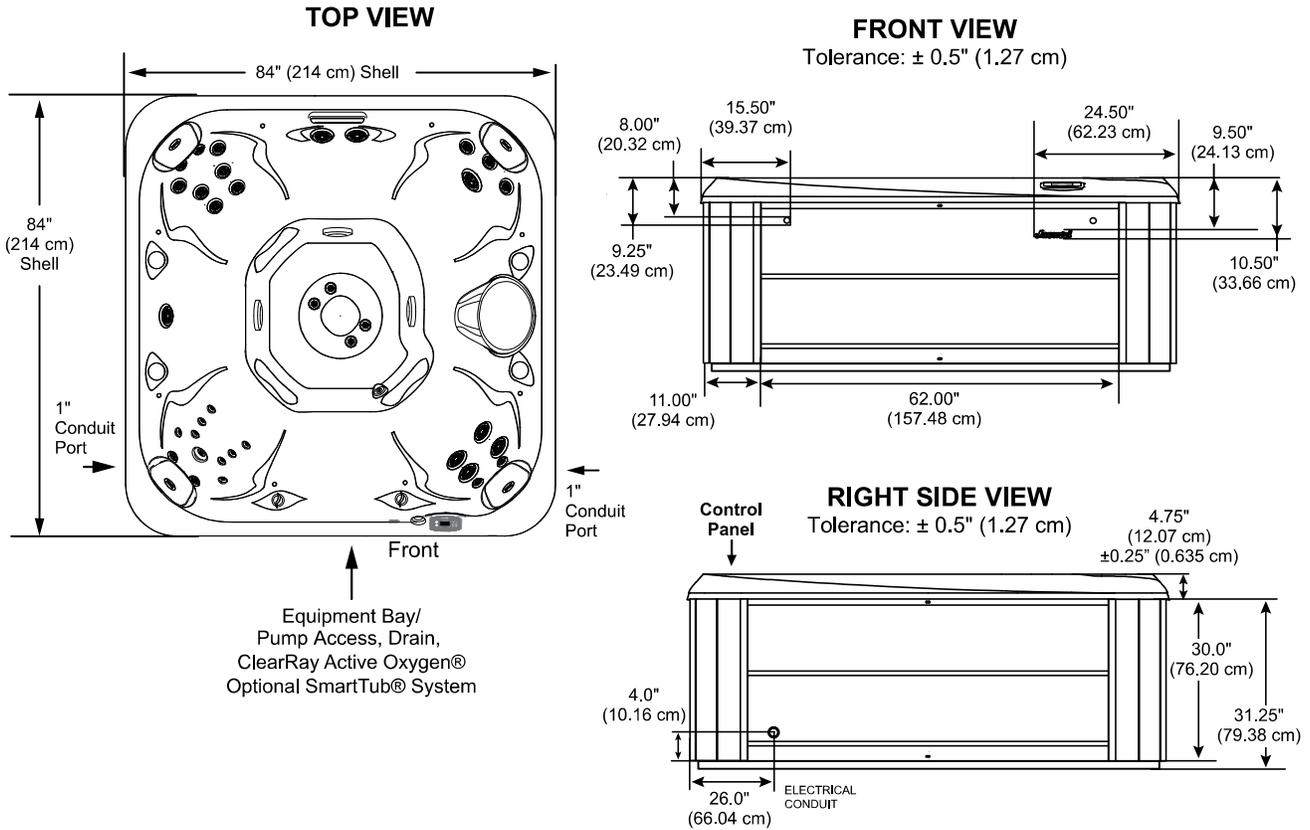

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Cabinet Radius:
 $\approx 9.0"$ (22.86 cm)

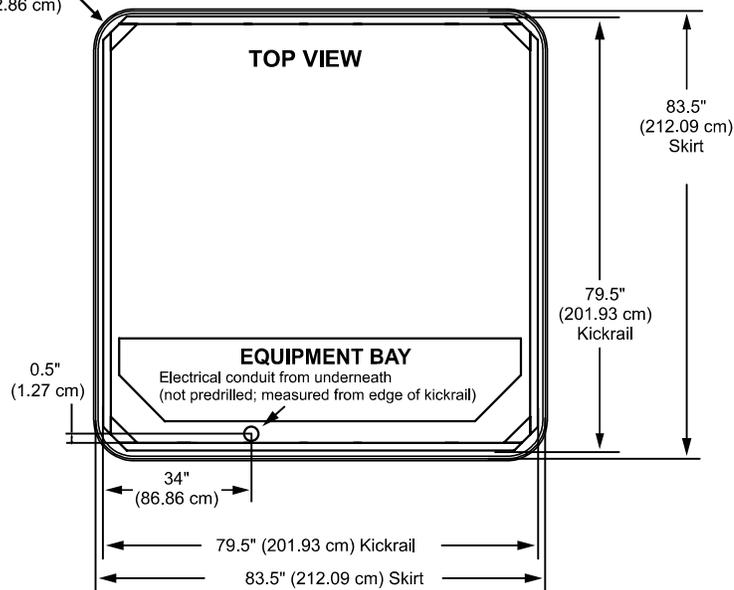

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance $\pm 0.5"$ (1.27 cm)